


VRTNÉ TYČE - parametry



Bezeichnung / Description	Abk. / Abbr.	PSG 146	PSG 146 5 1/2" IF	PSG 178	PSG 178 TIP	PSG 219
Außen ø Muffe / Outside ø Box	OD	159,0 mm	177,8 mm	193,7 mm	193,7 mm	229,0 mm
Innen ø / Inside ø	ID	128,0 mm	126,0 mm	161,5 mm	155,0 mm	200,0 mm
Außen ø Rohr / Outside ø Pipe	OD _R	146 mm	146 mm	177,8 mm	177,8 mm	219,1 mm
Drehmoment bei Streckgrenze / Torque at yield strength	Typ	22.699 Nm	53.806 Nm	21.074 Nm	43.053 Nm	25.105 Nm
Verschraubmoment / Torque	T _{mu}	13.619 Nm	24.996 Nm	12.644 Nm	25.832 Nm	15.063 Nm
Zugkraft / Attraction	Ten p	1.694 kN	3.760 kN	1.318 kN	2.666 kN	1.298 kN
Wandstärke / Insulation thickness	Wth	8,0 mm	10,0 mm	7,1 mm	10,0 mm	7,1 mm

STABILIZÁTOR - parametry

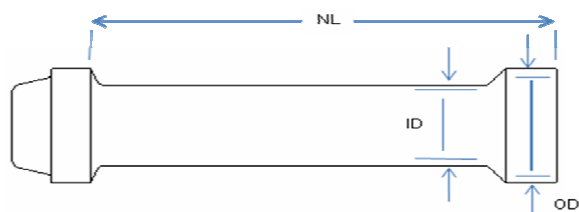

<u>Gewinde 1 /</u> <u>Thread 1</u>	<u>Gewinde 2 /</u> <u>Thread 2</u>	<u>OD [mm]</u>	<u>ID [mm]</u>	<u>NL [mm]</u>
<u>M-4 1/2 IF</u>	<u>Z-4 1/2 IF</u>	<u>240</u>	<u>90</u>	<u>2.000</u>
<u>M-4 1/2 IF</u>	<u>Z-4 1/2 IF</u>	<u>275</u>	<u>90</u>	<u>2.000</u>
<u>M-5 1/2 IF</u>	<u>Z-5 1/2 IF</u>	<u>310</u>	<u>110</u>	<u>2.000</u>
<u>M-5 1/2 IF</u>	<u>Z-5 1/2 IF</u>	<u>370</u>	<u>110</u>	<u>2.000</u>
<u>M-5 1/2 IF</u>	<u>Z-5 1/2 IF</u>	<u>440</u>	<u>110</u>	<u>2.000</u>

Obchodní oddělení
Kašparova 9, 460 06 Liberec 6
Tel./Fax: +420 485 134 308-9
obchod@ge-tra.cz
www.ge-tra.cz